

INFLUO

RH Heating & Insulation®

High Temp. Insulation Board


Type **IN** Style **BRD**

Description


INFLUO high temperature insulation board is made of fiberglass with minimum amount of high temperature binder exhibiting

Advantages


- _Temp. resistance to 300°C / 572°F
 - _Light Weight
 - _Density Approx. 0.55g / cm³
 - _Moisture and Oil resistance
 - _Easy to maintain and clean
 - _Semi-rigid allowing hand or machine cutting
 - _Excellent heat and energy conservation
 - _Low thermal conductivity
- | | |
|-------|-------------------------|
| 0.069 | w/m.k. [75oC - 150°C] |
| 0.078 | w/m.k. [175°C] |
| 0.08 | w/m.k. [200°C] |
| 0.082 | w/m.k. [225°C] |

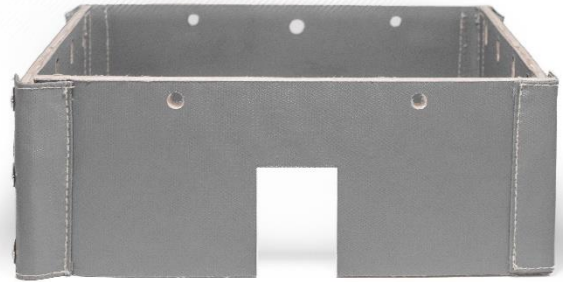

Front View

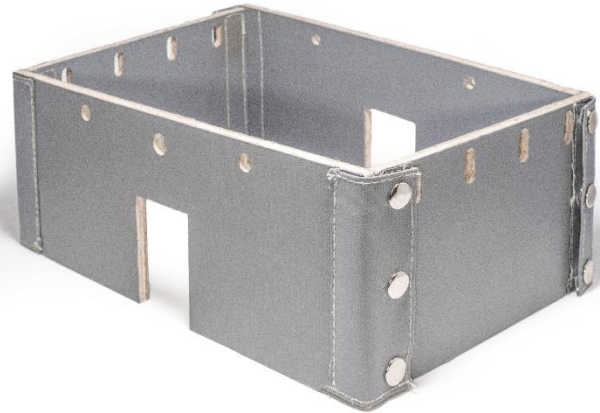

Side View

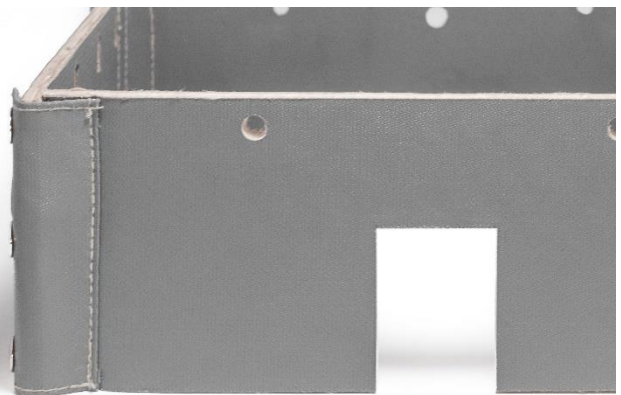

Close Up